



SikaMur[®] Finish

Ventilating Finishing Plaster for Decorative Finishes

Technical Data Sheet

DESCRIPTION

SikaMur Finish is a one component ready to use pre-bagged lime based plaster designed to provide a fine, smooth finishing coat over previously applied renders, such as **SikaMur Dry** or the **Sika 1 Structural Waterproofing System**. It is part of the **SikaMur** damp proofing system.

SikaMur System:

SikaMur Dry - bonding coat.

SikaMur Dry - plaster coat.

SikaMur Finish - finishing coat.

USES

- * Internal and external use.
- * Finishing masonry walls subject to rising damp.
- * Smooth surface to accept decorative coatings.
- * Heritage projects.

ADVANTAGES

- * Low vapour resistance for controlled drying of damp masonry
- * Workability upto 10 hours.
- * Excellent substrate bond.
- * Easily finished.
- * Just add water.
- * Pre-bagged for quality.

Technical Data (typical)

Mixed colour:	White
Mixed density:	1.10 kg/litre
Application thickness:	1.0 mm minimum 3.0 mm maximum
Application temperature:	+5°C min, +30°C max (Substrate and ambient)
Mix ratios:	7.5 - 10 litres of water per 25 kg bag depending on workability required
'Working time':	Up to 10 hours

All above values are approximate.



SUBSTRATE PREPARATION

All existing substrates (ie **SikaMur Dry** or **Sika 1** render) to be clean, contaminant free and pre-dampened.

MIXING

Add the required amount of water and mix using a slow speed drill with paddle or a forced action mixer until a uniform mix is achieved. Allow to stand for two minutes before using. **SikaMur Finish** may be used up to 10 hours after mixing subject to periodic remixing.

APPLICATION

Trowel apply in 1 - 3 mm thick layers using a plasterers float. Leave until initial set and trowel finish to the desired texture.

CURING

Attention should be given to curing, ensuring full hydration of the mortar using, where required, damp hessian or polythene sheeting to minimise risk of cracking.

IMPORTANT CONSIDERATIONS

- * Ensure adequate drying out prior to painting ie approx 3 weeks.
- * External decorative/protective finishing can be provided using **Sika** vapour permeable coatings.
- * Only use clean potable water.
- * Do not mix any additives.
- * Protect against rain for at least 6 hours.

CLEANING

Remove **SikaMur Finish** from tools and equipment with clean water. Hardened material will require mechanical removal.

PACKAGING


Refer to latest price list.

CONSUMPTION

1.10 kg/m² per 1 mm layer thickness.
Excluding allowances for loss, wastage and surface profile.

STORAGE AND SHELF LIFE

Minimum 6 months in original unopened sealed containers stored in dry warehouse conditions (+10°C - +30°C).

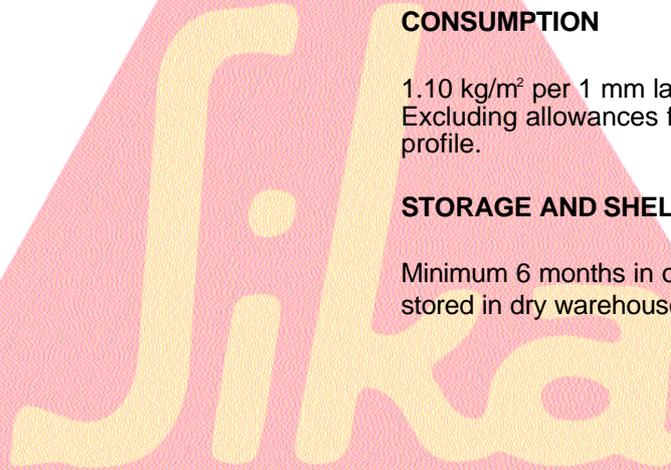

Handling Precautions

Sika products are generally harmless provided that certain precautions normally taken when handling chemicals are observed. The materials must not, for instance, be allowed to come in contact with foodstuffs or food utensils and measures should also be taken to prevent the uncured materials from coming in contact with the skin, since people with particularly sensitive skin may be affected. The use of protective clothing, goggles, barrier creams and rubber gloves is required. The skin should be thoroughly cleaned at the end of each working period either by washing with soap and warm water or by using a resin-removing cream - the use of powerful solvents is to be avoided. Disposable paper towels - not cloth towels - should be used to dry the skin. Adequate ventilation of the working area is recommended. In case of accidental eye or mouth contact, flush with water - consult a doctor immediately. Health and Safety information on Sika Products is available and we strongly advise that this is read prior to their use. Sika products are for professional use and should be stored in sealed containers away from the reach of children.

Important Note

The information, and, in particular, the recommendations relating to the application and end-use of Sika products, are given in good faith based on Sika's current knowledge and experience of the products when properly stored, handled and applied under normal conditions. In practice, the differences in materials, substrates and actual site conditions are such that no warranty in respect of merchantability or of fitness for a particular purpose, nor any liability arising out of any legal relationship whatsoever, can be inferred either from this information, or from any written recommendations, or from any other advice offered. The proprietary rights of third parties must be observed. All orders are accepted subject to our current terms of sale and delivery. Users should always refer to the most recent issue of the Technical Data Sheet for the product concerned, copies of which will be supplied on request.

Please consult our Technical Sales Department for further information

SIKA LIMITED

Watchmead, Welwyn Garden City, Hertfordshire, AL7 1BQ

Tel: 01707 394444 Email: sika@uk.sika.com

Fax: 01707 329129 www.sika.com

